

LED CANOPY CM10



Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Motion sensor (optional).
- Long lifespan of 50,000 hours at 40°C.



Technical specification

Model Number	CM10		
Input Voltage	120-277V		
CRI	>70		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV (6KV available upon request)		
Efficacy	Up to 151lm/w		
Wattage(Selectable)	50%, 75%, 100%		
Color Temperature (Selectable)	3000K	4000K	5000K
CM10-25W	3536lm	3820lm	3689lm
CM10-45W	6367lm	6833lm	6709lm
CM10-68W	9267lm	9932lm	9704lm


• All values are nominal with $\pm 10\%$ tolerance.

Applications

- Parking Garages
- Work Shop
- Storefronts
- Warehouses
- Garages
- Vestibules



Dimensions

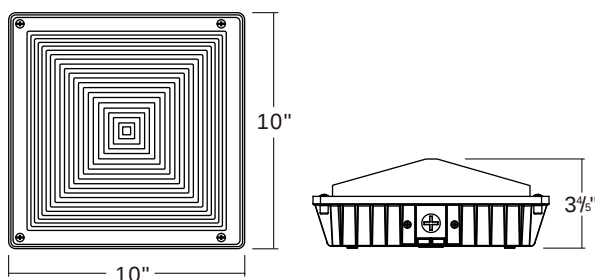

Photometrics

