

LED CANOPY

CM21



Technical specification

Model Number	CM21		
Input Voltage	120-277V		
CRI	>70		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV		
Dimming	0-10V		
Control(optional)	Motion Sensor / Photocontrol		
Efficacy	Up to 160lm/w		
Wattage(Selectable)	50%,75%,100%		
Color Temperature (Selectable)	3000K	4000K	5000K
CM21-45W	6625lm	7096lm	7000lm
CM21-65W	9782lm	10503lm	10136lm

* All values are nominal with $\pm 10\%$ tolerance.

Features

- Die-cast aluminum housing for durability and heat dissipation.
- Multiple installation options (conduit/ pendant/ junction box).
- Motion seneor (optional).
- Quick connect plate.
- Long lifespan of 50,000 hours at 40°C.




Applications

- Parking Garages
- Work Shop
- Storefronts
- Warehouses
- Garages
- Vestibules



Dimensions

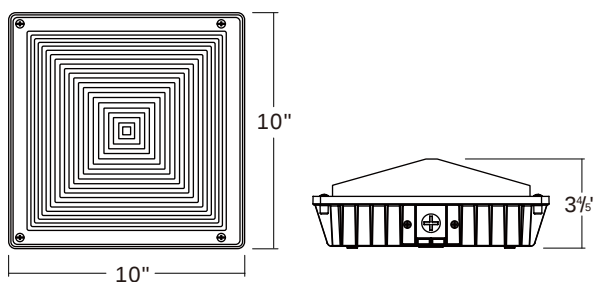

Photometrics

