

LED FLOOD LF81



Technical specification

Model Number	LF81		
Input Voltage	120-277V		
CRI	>70		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV		
Photocontrol	On/off		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 166lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
LF81-15W	2123lm	2269lm	2220lm
LF81-35W	5454lm	5840lm	5598lm

* All values are nominal with $\pm 10\%$ tolerance.

Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Integrated photocontrol for automatic dusk-to-dawn operation.
- Long lifespan of 50,000 hours at 40°C.



Accessories



Mounting Canopy



Yoke




Knuckle

Applications


- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



Dimensions

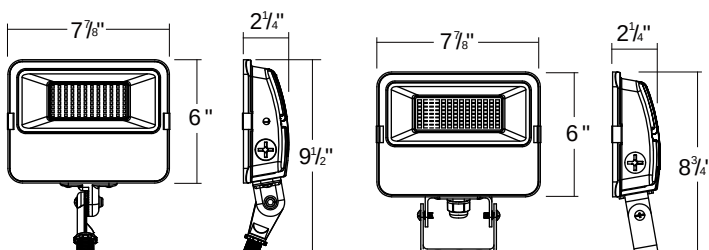

Photometrics

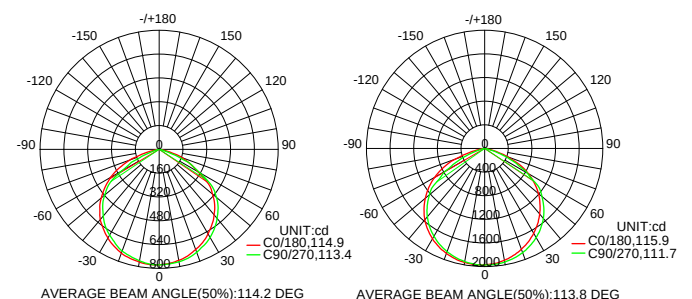

LF81- 15W/2269lm

LF81- 35W/5840lm