

LED AREA WM51



Technical specification

Model Number	WM51		
Input Voltage	120-277V		
Dimming	0-10V		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV		
Control	Photocontrol		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 163lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WM51-55W	7797lm	8370lm	8198lm
WM51-75W	10635lm	11701lm	11390lm

• All values are nominal with $\pm 10\%$ tolerance.


Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Multi-voltage twist-lock photocontrol for easy replacement.
- Long lifespan of 50,000 hours at 40°C.




Applications

- Barn
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters

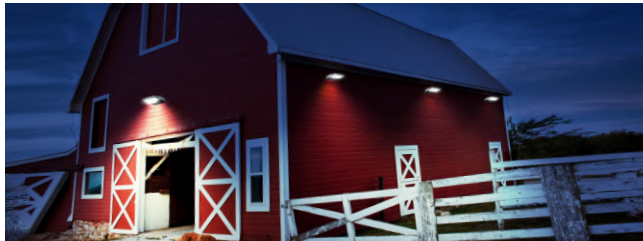

Dimensions

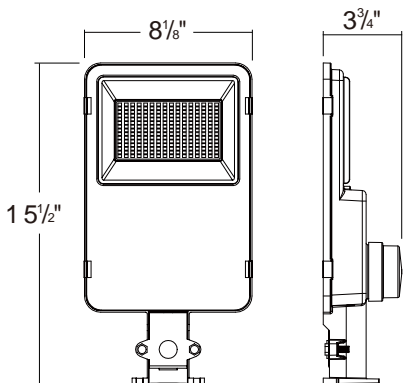

Photometrics

