

# LED FULL CUTOFF WALL PACK WP24



## Technical specification

Model Number	WP24		
Input Voltage	120-277VAC		
CRI	>70		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 151lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WP24-25W	2952lm	3302lm	3030lm
WP24-40W	5471lm	6046lm	5669lm

• All values are nominal with  $\pm 10\%$  tolerance.

## Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Polycarbonate lens provide forward throw light distribution.
- Long lifespan of 50,000 hours at 40°C.




## Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



## Dimensions

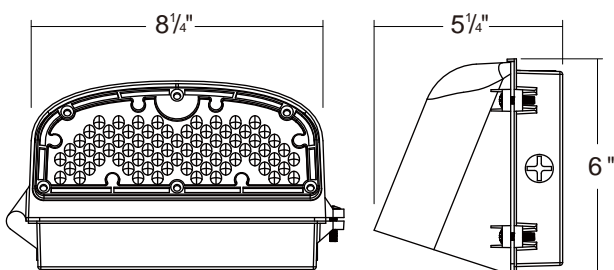

## Photometrics

