

LED FULL CUTOFF WALL PACK WP25



Technical specification

Model Number	WP25		
Input Voltage	120-277VAC		
CRI	>70		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV		
Photocell	Built in, Optional		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 146lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WP25-70W	9170lm	10039lm	9194lm
WP25-110W	14243lm	16123lm	14676lm

• All values are nominal with $\pm 10\%$ tolerance.

Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Polycarbonate lens provide forward throw light distribution.
- Long lifespan of 50,000 hours at 40°C.




Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



Dimensions

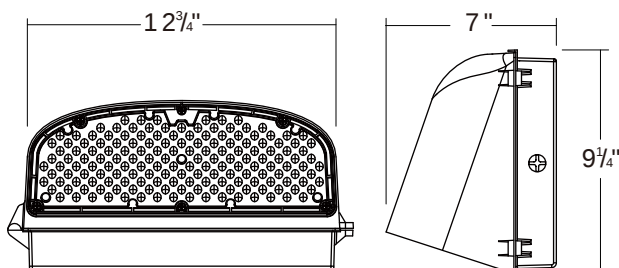

Photometrics

