

LED FULL CUTOFF WALL PACK

WP26





Features

- Die-cast aluminum housing for durability and heat dissipation.
- Polycarbonate lens provide forward throw light distribution.
- Long lifespan of 50,000 hours at 40°C.



Technical specification

Model Number	WP26
Input Voltage	120-277VAC
CRI	>70
Power Factor	>0.9
THD	<20%
Ambient Operating Temp.	-40~40°C
Surge Protection	4KV
Dimming	Included
Photocell	Built in, Optional
Efficacy	Up to 145lm/w
Color Temperature	4000K or 5000K
Wattage	107W (14949lm)
	143W (20858lm)


• All values are nominal with ± 10% tolerance.

Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



Dimensions

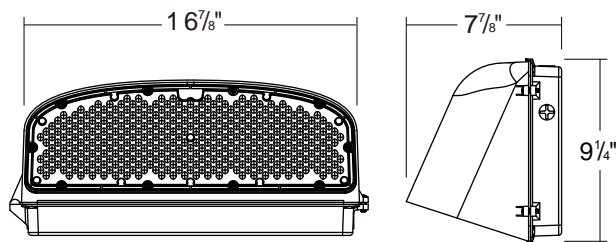

Photometrics

