

LED WALL PACK

WP52



Technical specification

Model Number	WP52		
Input Voltage	120-277VAC		
Dimming	0-10V		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV(6KV available upon request)		
Control	Photocontrol (Optional)		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 157lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WP52-55W	8105lm	8508lm	8211lm
WP52-75W	10618lm	11530lm	11228lm
WP52-115W	16283lm	18099lm	17224lm

* All values are nominal with $\pm 10\%$ tolerance.

Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Impact and tempered glass lens is precisely designed for optimal light distribution and efficiency.
- Long lifespan of 50,000 hours at 40°C.




Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



Dimensions

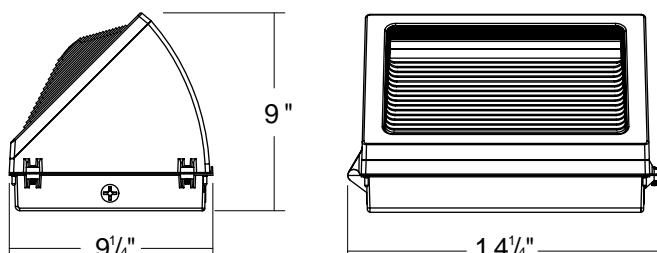

Photometrics

