

# LED WALL PACK

## WP53



### Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Impact and tempered glass lens is precisely designed for optimal light distribution and efficiency.
- Long lifespan of 50,000 hours at 40°C.



### Technical specification

Model Number	WP53		
Input Voltage	120-277VAC		
Dimming	0-10V		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Control	Photocontrol (Optional)		
Surge Protection	4KV		
Wattage (Selectable)	50%, 75%, 100%		
Efficacy	Up to 157lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WP53-149W	21818lm	23440lm	23035lm


• All values are nominal with  $\pm 10\%$  tolerance.

### Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



### Dimensions

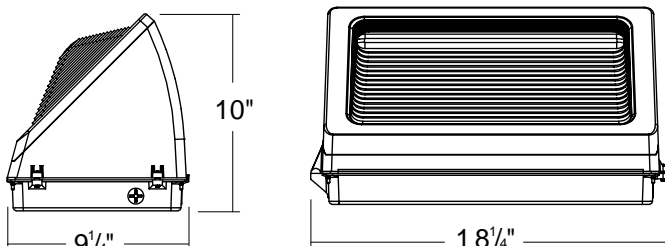

### Photometrics

