

# LED WALL PACK WP53E



## Features

- Die-cast aluminum housing for durability and heat dissipation.
- Impact-resistant polycarbonate lens is precisely designed for optimal light distribution and efficiency.
- Long lifespan of 50,000 hours at 40°C.



## Technical specification

Model Number	WP53E
Input Voltage	120-277VAC
Power Factor	>0.9
THD	<20%
Ambient Operating Temp.	-40~40°C
CRI	>70
Surge Protection	4KV
Control	Photocontrol (Optional)
Efficacy	156lm/w
Color Temperature	4000K or 5000K
Wattage	169W(26497lm)


\* All values are nominal with  $\pm 10\%$  tolerance.

## Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



## Dimensions

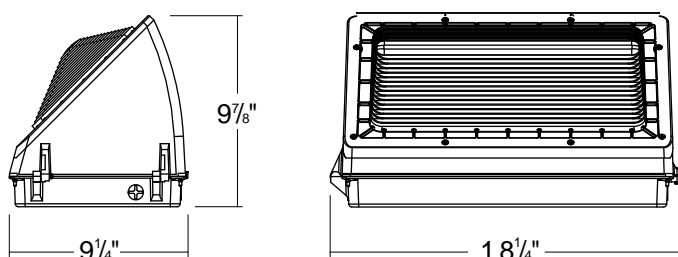

## Photometrics

