

LED WALL PACK

WP51



Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Impact and tempered glass lens is precisely designed for optimal light distribution and efficiency.
- Long lifespan of 50,000 hours at 40°C.



Technical specification

Model Number	WP51		
Input Voltage	120-277VAC		
Dimming	0-10V		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 139lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WP51-45W	5694lm	6270lm	5930lm


• All values are nominal with $\pm 10\%$ tolerance.

Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



Dimensions

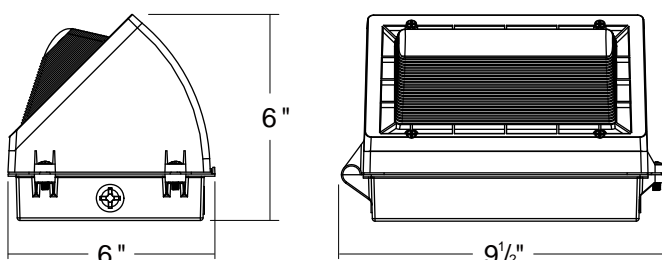

Photometrics

