

LED WALL MOUNT

WM32



Technical specification

Model Number	WM32		
Input Voltage	120-277VAC		
CRI	>70		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV		
Control	Photocontrol (on/off switch)		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 163lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WM32-26W	3918lm	4150lm	4054lm

▲All values are nominal with ± 10% tolerance.

Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Integrated photocontrol for automatic dusk-to-dawn operation.
- Long lifespan of 50,000 hours at 40°C.




Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



Dimensions

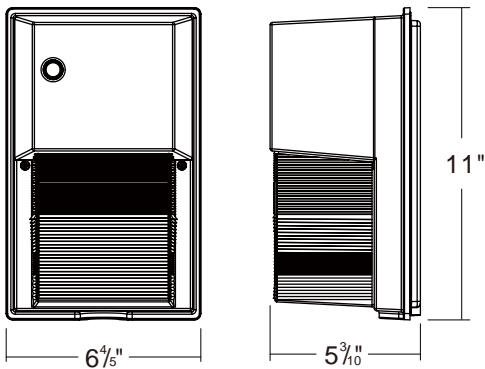

Photometrics

