

LED WALL PACK WP52E



Technical specification

Model Number	WP52E
Input Voltage	120-277VAC
Power Factor	>0.9
THD	<20%
Ambient Operating Temp.	-40~40°C
CRI	>70
Surge Protection	4KV
Control	Photocontrol (Optional)
Efficacy	155lm/w
Color Temperature	4000K or 5000K
Wattage	69W(10760lm)
	110W(17055lm)
	169W(26497lm)

* All values are nominal with $\pm 10\%$ tolerance.

Features

- Die-cast aluminum housing for durability and heat dissipation.
- Impact-resistant polycarbonate lens is precisely designed for optimal light distribution and efficiency.
- Long lifespan of 50,000 hours at 40°C.




Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



Dimensions

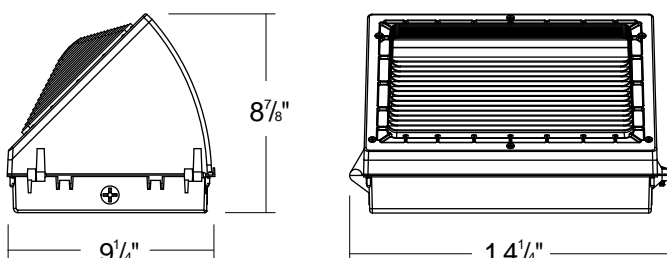

Photometrics

